



# **FLOW-PRO®**

**MELT BLOWN FILTER CARTRIDGES**

# Flow-Pro® Polypropylene Melt Blown Cartridges

*Exceptional value with depth filtration is required.*



## Features & benefits

- Low cost
- Excellent chemical resistance
- Food grade ingredients
- No leachables
- High dirt holding capacity
- Wide range of lengths and micron ratings




## Typical applications

- Potable water
- Beverages
- Pre-filtration for reverse osmosis equipment
- Fine chemicals
- Electronics
- Plating solutions and more!

## Specifications

Material	Melt blown polypropylene
Maximum temperature	140° F / 60° C
Maximum pressure	40 PSID
Recommended change out	30 PSID
Maximum flow rate	2-8 GPM (based on micron rating)
Cartridge packaging	Individually shrink wrapped for purity
Types	Standard, Full-Flow and grooved
Micron ratings	1, 5, 20 and 50

## Pressure drop

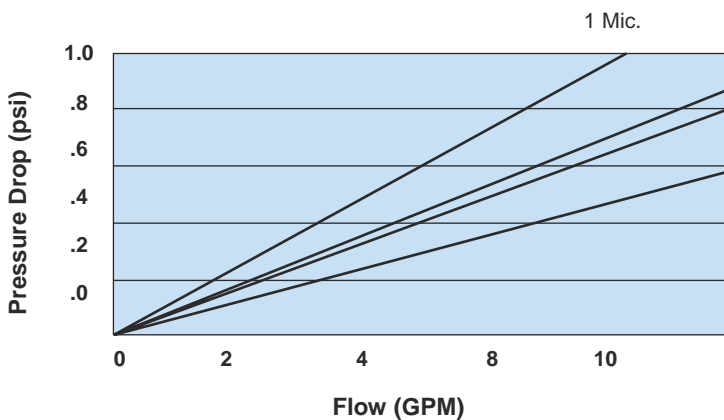

5 Mic.  
20 Mic.  
50 Mic.

Grooved cartridges are available for greater surface area, longer life and reduced filtration costs.



# Flow-Pro® Melt Blown Cartridges



ANSI / NSF  
STANDARD 42  
COMPONENT  
CERTIFIED

## Standard diameter (2-1/2") 5"

Part Number	Length	OD	Micron	No. / case
FPMB1-5	5"	2-1/2"	1	48
FPMB5-5	5"	2-1/2"	5	48
FPMB20-5	5"	2-1/2"	20	48
FPMB50-5	5"	2-1/2"	50	48

## 9-7/8"

FPMB1-978	9-7/8"	2-1/2"	1	48
FPMB5-978	9-7/8"	2-1/2"	5	48
FPMB10-975	9-7/8"	2-1/2"	10	48
FPMB20-978	9-7/8"	2-1/2"	20	48
FPMB25-978	9-7/8"	2-1/2"	25	48
FPMB50-978	9-7/8"	2-1/2"	50	48

## 20"

FPMB1-20	20"	2-1/2"	1	24
FPMB5-20	20"	2-1/2"	5	24
FPMB20-20	20"	2-1/2"	20	24
FPMB50-20	20"	2-1/2"	50	24

## 29-1/4"

FPMB5-2925	29-1/4"	2-1/2"	5	24
------------	---------	--------	---	----

## 30"

FPMB1-30	30"	2-1/2"	1	24
FPMB5-30	30"	2-1/2"	5	24
FPMB20-30	30"	2-1/2"	20	24
FPMB50-30	30"	2-1/2"	50	24

## 40"

FPMB1-40	40"	2-1/2"	1	24
FPMB5-40	40"	2-1/2"	5	24
FPMB20-40	40"	2-1/2"	20	24
FPMB50-40	40"	2-1/2"	50	2

## Full-Flow (B-B) 9-3/4" x 4-1/2" O.D. cartridges

Part Number	Length	OD	Micron	No. / case
FPMB-BB1-10	9-3/4"	4-1/2"	1	24
FPMB-BB5-10	9-3/4"	4-1/2"	5	24
FPMB-BB20-10	9-3/4"	4-1/2"	20	24
FPMB-BB50-10	9-3/4"	4-1/2"	50	24

## Full-Flow (B-B) 20" x 4-1/2" O.D. cartridges

Part Number	Length	OD	Micron	No. / case
FPMB-BB1-20	20"	4-1/2"	1	12
FPMB-BB5-20	20"	4-1/2"	5	12
FPMB-BB20-20	20"	4-1/2"	20	12
FPMB-BB50-20	20"	4-1/2"	50	12

# FLOW-PRO<sup>®</sup>

## MELT BLOWN FILTER CARTRIDGES



### Grooved cartridges are also available

Grooved Flow-Pro cartridges are also available for greater surface area to provide increased throughput and reduced costs. The same specifications and pressure drop rates apply, and grooved cartridges are also NSF certified.

### Part numbers

Part Number	Length	OD	Micron	No. / case
FPMBG-1-975	9-3/4"	2-1/2"	1	48
FPMBG-5-975	9-3/4"	2-1/2"	5	48
FPMBG-10-975	9-3/4"	2-1/2"	10	48
FPMBG-20-975	9-3/4"	2-1/2"	20	48
FPMBG-1-20	20"	2-1/2"	1	24
FPMBG-5-20	20"	2-1/2"	5	24

*Distributed by:*



204 N. Link Lane #7  
Fort Collins, CO 80524  
970-204-4758

brandon@industrialfiltersource.com  
www.IndustrialFilterSource.com

Printed in USA. © 2006 Watts Water Quality & Conditioning Products.