


**MODULAR FILTER  
HOLDING FRAMES  
FOR ASHRAE RATED  
PREFILTERS AND  
FINAL FILTERS**

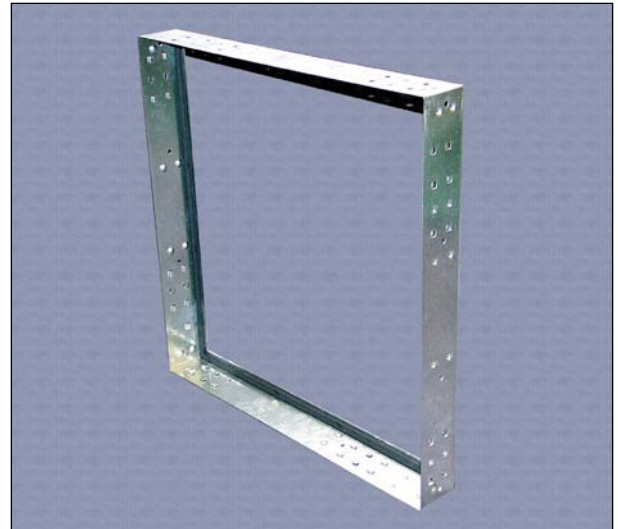

**FEATURES:**

- ☑ Available in Two Stock Depths
- ☑ Seven Standard Sizes Available
- ☑ Easy To Install
- ☑ Available in 16 Gauge Aluminized, Galvanized and 18 Gauge 304 Stainless Steel
- ☑ Functional in Either Front or Rear Load Applications
- ☑ Can be Used with Virtually All ASHRAE Rated Filters
- ☑ Multiple Stages per Frame
- ☑ Optional Gasketing


The TRI-MET™ TM8 Universal Holding Frame is a modular filter bank system that can be utilized in new construction or in renovation projects, such as auto roll conversions.

The TRI-MET™ TM8 frames can be easily assembled by either welding, pop riveting or by using nuts and bolts through predrilled self-aligning holes. In installations where the TRI-MET™ TM8 frames are stacked more than three high a support bar should be used.

TRI-MET™ TM8 frames are available in seven standard sizes with two standard depths (2-5/8" and 3") in a variety of metals – choices include 16 gauge Galvanized, Aluminized and 18 Gauge 304 Stainless Steel. Frames include dimples that provide self-alignment of filters.

TRI-MET™ TM8 can be used in either Upstream or Downstream access applications. TRI-MET™ TM8 frames are designed to hold virtually all ASHRAE rated air filters. Multiple stages of air filters can be held in a single TRI-MET™ TM8 frame depending on the fastening device chosen. See the back of this brochure for more information on fastener options.

TRI-MET™ TM8 frames are available with optional foam gasketing. Tri-Dim recommends the use of gasketed frames to help reduce air bypass around filters. Tri-Dim also recommends the use of caulk in-between TRI-MET™ TM8 frames to eliminate air bypass.



**Corner Clip**  
Equal to Farr C-70



**Prefilter Clip**  
Equal to Farr C-79 Series



**12" Spring Clip**  
Equal to Farr C-80



**6" Spring Clip**  
Equal to Farr C-90





**TM8-WF CLIP**  
Equal to Farr C-86 or C-89



**TM8-GC CLIP**  
Equal to Farr C-77

**TRI-MET™ TM8 Drawing**

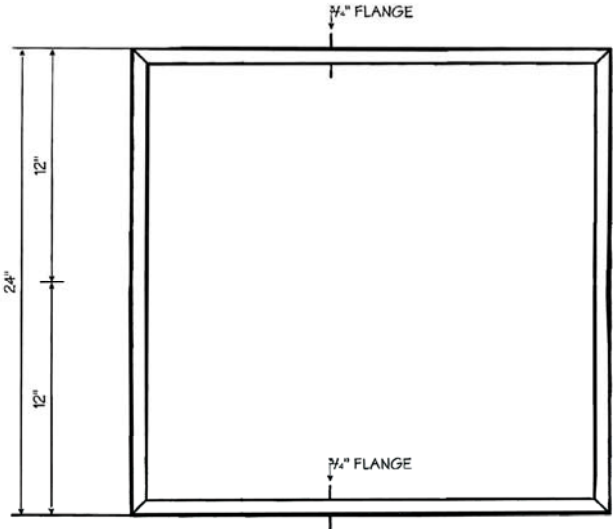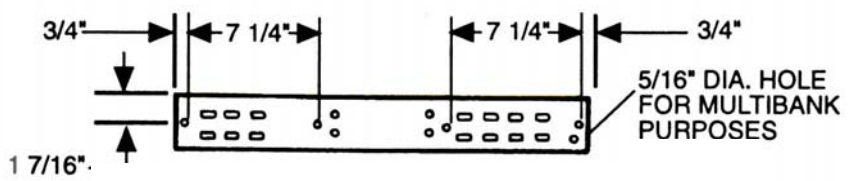

(left) Close-up of TRI-MET™ TM8 corner showing multiple clip attachment options.  
(above) Close-up of TRI-MET™ TM8 dimples that provide self-alignment of filters.

**TRI-MET™ TM8 Fastener Options**

Fastener Type	Size	Typical Application
Prefilter Clip	2"	2" Prefilter to the face of a C-Style Final Filter
Prefilter Clip	4"	4" Prefilter to the face of a C-Style Final Filter
Corner Clip	-	Prefilters (1 or 2" Thick) or Single Header Final Filter
12" Spring Clip	12"	12" Thick Final Filter with No or Double Header
6" Spring Clip	6"	6" Thick Final Filter with No or Double Header
TM8-WF Clip	-	3" to 5" Thick Filter or Combination of Filters
TM8-GC Clip	-	3" to 4" Thick Filter or Combination of Filters

Farr® is a registered trademark of Camfil Farr, Inc and is used only with Farr® model numbers for identification purposes only.  
Tri-Dim Filter Corporation is committed to continual product development – all descriptions and specifications are subject to change without notice.



TRI-DIM FILTER CORPORATION  
P.O. BOX 466 • 93 INDUSTRIAL DRIVE  
LOUISA, VA 23093  
(540) 967-2600 • FAX: (540) 967-2835  
EMAIL: info@tridim.com • Website: www.tridim.com  
TOLL FREE 1-800-458-9835

**Local Representation:**



204 N. Link Lane #7  
Fort Collins, CO 80524  
Office: 970-204-4758 Fax: 970-204-4764  
Brandon@IndustrialFilterSource.com  
IndustrialFilterSource.com.